


# Pipe Fittings – Double Hubs & Stoppers

## Double Hubs

Used to join two spigots together.


Pipe Size	Nominal Laying Length	Approx. Shipping Weight (Lbs.)	Fittings per Pack
4"	3"	9	70
6"	4"	25	56
8"	5"	36	32
10"	5"	55	30
12"	7"	82	24

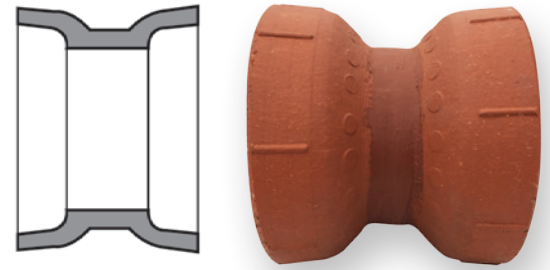

## Stoppers

For closing branches. Available in O-Ring, plain and concrete.

Pipe Size	O-Ring		Plain Clay		Concrete	
	O.D.	Thickness	O.D.	Thickness	O.D.	Thickness
4"	5 1/2"	1 3/8"	5"	7/8"	N/A	N/A
6"	8 1/4"	1 3/8"	8 3/4"	1 1/8"	N/A	N/A
8"	10 3/4"	1 5/8"	10"	1 1/8"	10 1/2"	2"
10"	13 1/4"	1 3/4"	12 1/2"	1 1/4"	13 1/4"	2"
12"	15 5/8"	2"	15"	1 1/4"	15 1/4"	2"
15"	19 1/4"	2 1/8"	18"	1 1/2"	18 3/4"	2 1/8"
18"	23 1/8"	2 3/8"	20 5/8"	1 1/2"	21"	2 1/8"
21"	27"	3"	N/A	N/A	26"	2 1/8"
24"	30 7/8"	3"	N/A	N/A	29"	2 1/8"



All O-Ring stoppers have handles. The 10" and 12" concrete stoppers have lifting holes, the 15" and above have handles. The plain clay stoppers have no handles. O-Ring stoppers can be wired or banded in O-Ring pipe.

